


	A	B	C	D	E	F	G
1/2"	78	55	14	38	58	73	48
3/4"	85	60	19	42	58	82	55
1"	98	70	25	45	58	98	65
1"1/4	110	87	25	60	77	110	72

TIPO/TYPE	1/2	3/4	1
	11/4		

Diagramma log. perdite di carico / portata  
Load losses / flow rate log.graph

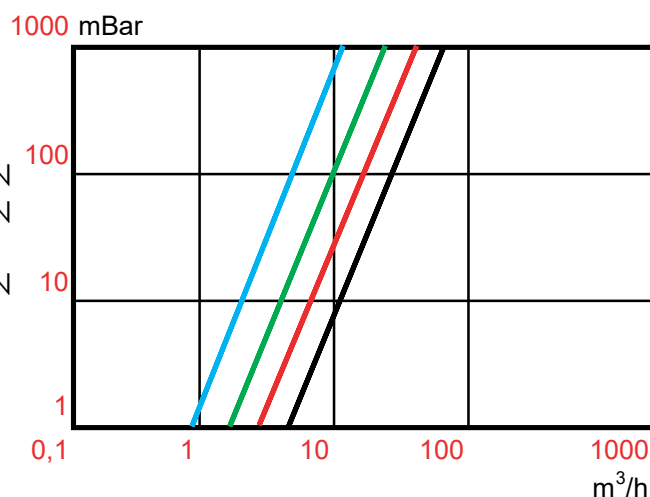

### MATERIALI / MATERIALS

corpo / body	UNI EN 12165CW617N
sfera / ball	UNI EN 12165CW617N
sedì tenuta sfera / ball seal	PTFE
asta / stem	UNI EN 12164CW614N
tenuta asta / stem seal	PTFE
leva / handle	Al
dado / nut	OT C.P. BRASS
temperatura / temperature	0°- 80°C
pressione / pressure	0 - 20 bar