

REMER

RUBINETTERIE

FLESSIBILI ANTIVIBRANTI INOX

TRECCIA IN ACCIAIO INOX PER POMPE E AUTOCLAVI


STAINLESS STEEL ANTI-VIBRATION FLEXIBLES

STAINLESS STEEL BRAIDED FOR PUMPS AND AUTOCLAVES

APPLICAZIONI - APPLICATIONS



MATERIALI - MATERIALS

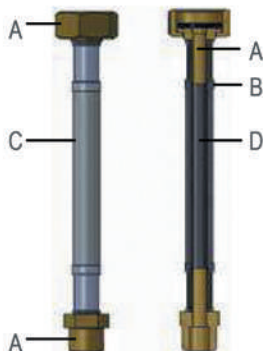

RACCORDI - FITTINGS:

A) Ottone CW614N e CW617N giallo o nichelato
Brass CW614N and CW617N yellow or nickel plated

BUSSOLE - SLEEVES:

B) Alluminio 99,5%
Aluminium 99,5%

TUBO - HOSE:

C) Treccia in Acciaio AISI 304
Braid in Steel AISI 304
D) Tubo interno: gomma EPDM atossico
Internal pipe EPDM rubber, atoxic

CARATTERISTICHE - FEATURES



DN 13 - 1/2"	DN 19 - 3/4"	DN 25 - 1"	DN 32 1" 1/4	DN 40 - 1" 1/2	DN 50 2"
PRESSIONE D'ESERCIZIO - WORKING PRESSURE:					
15 BAR	15 BAR	15 BAR	9 BAR	6 BAR	7 BAR



DN 13 - 1/2"	DN 19 - 3/4"	DN 25 - 1"	DN 32 1" 1/4	DN 40 - 1" 1/2	DN 50 2"
PORTATA A 3 BAR - FLOW RATE AT 3 BAR:					
65 lit/min	120 lit/min	200 lit/min	400 lit/min	700 lit/min	1.050 lit/min



DN 13 - 1/2"	DN 19 - 3/4"	DN 25 - 1"	DN 32 1" 1/4	DN 40 - 1" 1/2	DN 50 2"
TEMPERATURA D'IMPIEGO - WORKING TEMPERATURE:					
-10°C +90°C	-10°C +90°C	-10°C +90°C	-10°C +90°C	-10°C +90°C	-10°C +90°C



DN 13 - 1/2"	DN 19 - 3/4"	DN 25 - 1"	DN 32 1" 1/4	DN 40 - 1" 1/2	DN 50 2"
FORO MINIMO PASSAGGIO D'ACQUA - FITTING INNER DIAMETER:					
9,3 mm	15 mm	20 mm	25 mm	32 mm	40 mm



DN 13 - 1/2"	DN 19 - 3/4"	DN 25 - 1"	DN 32 1" 1/4	DN 40 - 1" 1/2	DN 50 2"
RAGGIO CURVATURA MINIMO - MINIMUM BENDING RADIUS:					
45 mm	70 mm	100 mm	190 mm	230 mm	300 mm



DN 13 - 1/2"	DN 19 - 3/4"	DN 25 - 1"	DN 32 1" 1/4	DN 40 - 1" 1/2	DN 50 2"
Ø INTERNO - INNER Ø:					
Ø 13 mm	Ø 19 mm	Ø 25 mm	Ø 30 mm	Ø 40 mm	Ø 50 mm



DN 13 - 1/2"	DN 19 - 3/4"	DN 25 - 1"	DN 32 1" 1/4	DN 40 - 1" 1/2	DN 50 2"
Ø ESTERNO - OUTER Ø:					
Ø 19 mm	Ø 27 mm	Ø 33 mm	Ø 42 mm	Ø 52 mm	Ø 62 mm